

SpeedFace-H5

3-in-1 Starter Facial Recognition Terminal with 5-inch Touch Display











18:21 (((⊂))) 4 4 2K

Proactive Facial Recognition

New Height of Anti-Spoofing

ofing Reco


Wide Pose Angle Acceptance

Touchless for Better Hygiene



- Enhanced Visible Light Facial Recognition with Deep Learning built-in
- 3-in-1 verification with Fingerprint, RFID and Facial Recognition
- 5-inch touch LCD
- · Dual-camera for real-time face detection
- 6,000 face template capacity

- Recognition distance: 0.3 3 m
- Compatible with external RS232, RS485 and Wiegand reader
- \cdot TCP / IP, Wi-Fi communication

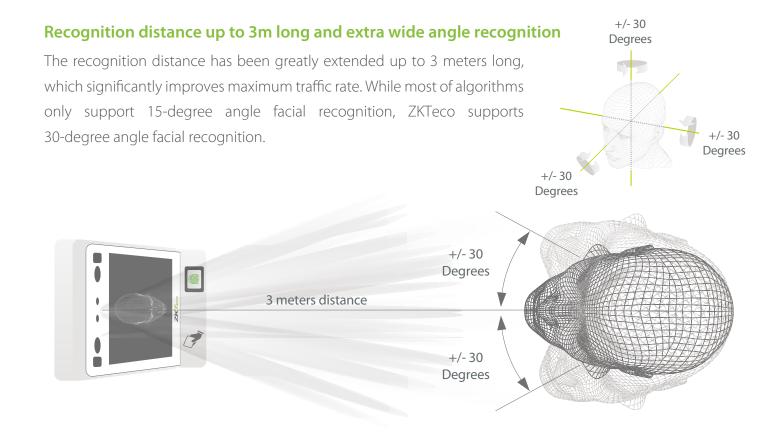



Specifications

| Model | | SpeedFace-H5 |
|-----------|---------------|--|
| Hardware | LCD | 5-inch touch screen |
| | CPU | Quad-core A17 1.8GHz |
| | Memory | 2G RAM / 16G ROM |
| | Camera | 2MP dual lens |
| | Communication | TCP / IP, Wi-Fi (optional) RS232, RS485 for external reader Wiegand Input/Output |
| | Accessory | Door lock, door sensor, alarm, exit button and auxiliary input |
| | Audio | Loudspeaker |
| Capacity | Users | 10,000 |
| | Face Template | 6,000 |
| | Fingerprint | 10,000 |
| | RFID | 10,000 |
| | Log | 200,000 |
| Operating | Voltage | 12V 3A |
| | Temperature | -10°C ~ 45°C |
| | Humidity | 10% ~ 90% |
| Software | | ZKBioAccess |

Optional Accessories



RS485 Fingerprint Reader



RFID Reader



Electric Lock




Alarm

7

Sensor

Exit Button

Dimensions (mm)





Copyright©2018 ZKTECO CO., LTD. All rights reserved.