

## HK-SFP-1.25G Series SFP Module

### Features and Functions

- Single Power Supply 3.3V
- Small Form Factor Pluggable (SFP) MSA Compatible
- Single Fiber Bi-Direction LC Connector
- Hot Pluggable Capability
- Compliant With ROHS Standard
- Cost effective SFP solution, enables higher port densities and greater bandwidth
- Support 1.25G Ethernet




## Specifications


Item	HK-SFP-1.25G-20-1310	HK-SFP-1.25G-20-1550
Fiber type	SMF, Single fiber, 9/125um	
Connector	LC	
Data Rate	1250 Mbps	
Connector quantity	1	
Distance	0~20km	
Wavelength	Tx1310nm/Rx1550nm	Tx1550nm/Rx1310nm
TX Power	-9~-1dBm	
RX Sens(Max.)	-21dBm	
Operating temperature	0~70°C	
Storage temperature	-40~85°C	
Relative humidity	30~80%	
Power supply voltage	DC 3.3V	

**Note:** HK-SFP-1.25G-20-1310 has to work with HK-SFP-1.25G-20-1550 as a pair.

## Typical applications

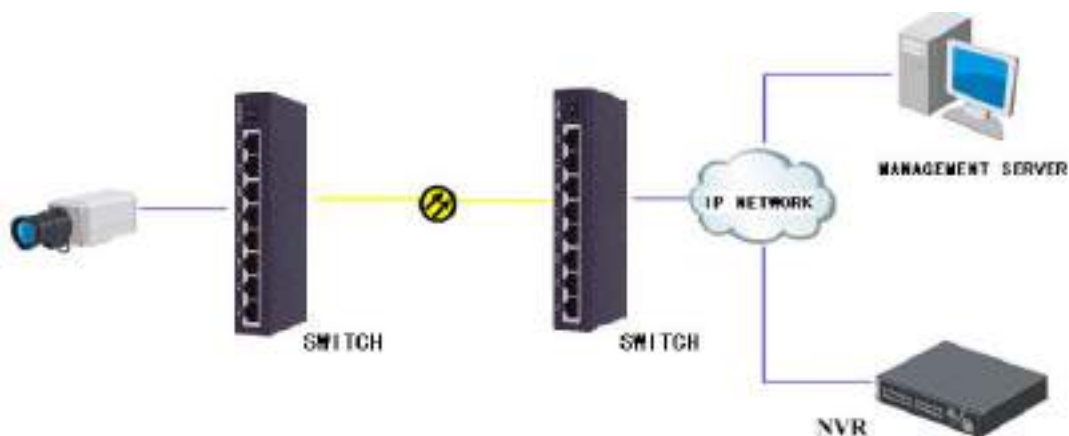

## Mechanical (mm)

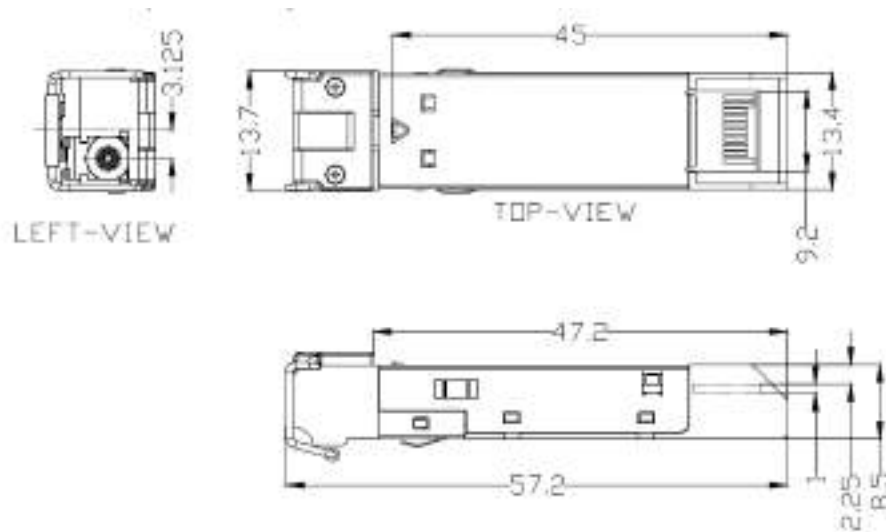

Distributed by



### Headquarters

No.555 Dianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5999  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0428-6802  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6894-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.euro@hikvision.com

**Hikvision France**  
T +33011-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
sales.au@hikvision.com

**Hikvision Middle East**  
T +971-4-8816088  
sales.me@hikvision.com

**Hikvision Spain**  
T +34-91-737-18-65  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-959-87-99  
sales.ru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-29469800  
sales@pram@hikvision.com

**Hikvision UK**  
T +44-1828-9021-4  
support.uk@hikvision.com